

Double Suction Pumps Multi Stage Type

energy API CE

SMD

● Applications

- Water Supply
- Utilities cooling water
- Boiler circulation
- General Industries
- Petroleum refinery
- Petrochemical industry


● Feature

- ✓ Improved capacity and high pressure
- ✓ Assures axial balance :long-life, low-maintenance cost
- ✓ High efficiency, Heavy and sturdy construction
- ✓ Completely standardization for wide application
- ✓ API standard 610 (API Code : BB3)


● Ratings

Capacity	Up to 35m ³ /min (9,246 US GPM)
Head	Up to 400m (1,312ft)
Discharge Pressure	Up to 60 kgf/cm ² (853 PSIG)
Allowable Suction Pressure	Up to 20 kgf/cm ² (284 PSIG)
Impeller	Enclosed
Temperature	-50°C ~ 150°C (-58°F ~ 302°F)
Flanges	ANSI, other standards also available
Materials	According to API 610 Material code


*API610 latest edition is available on request

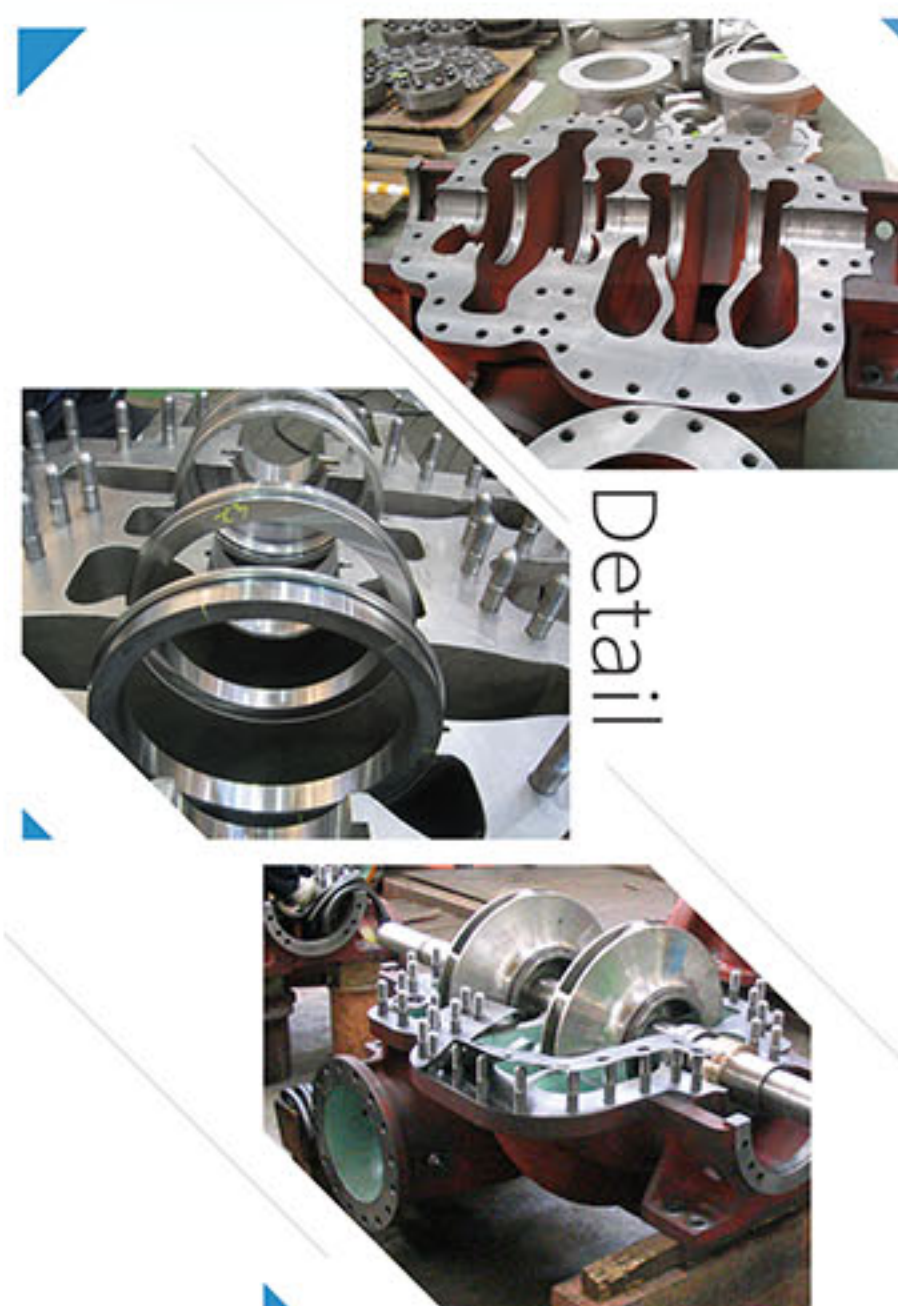

● Design drawing

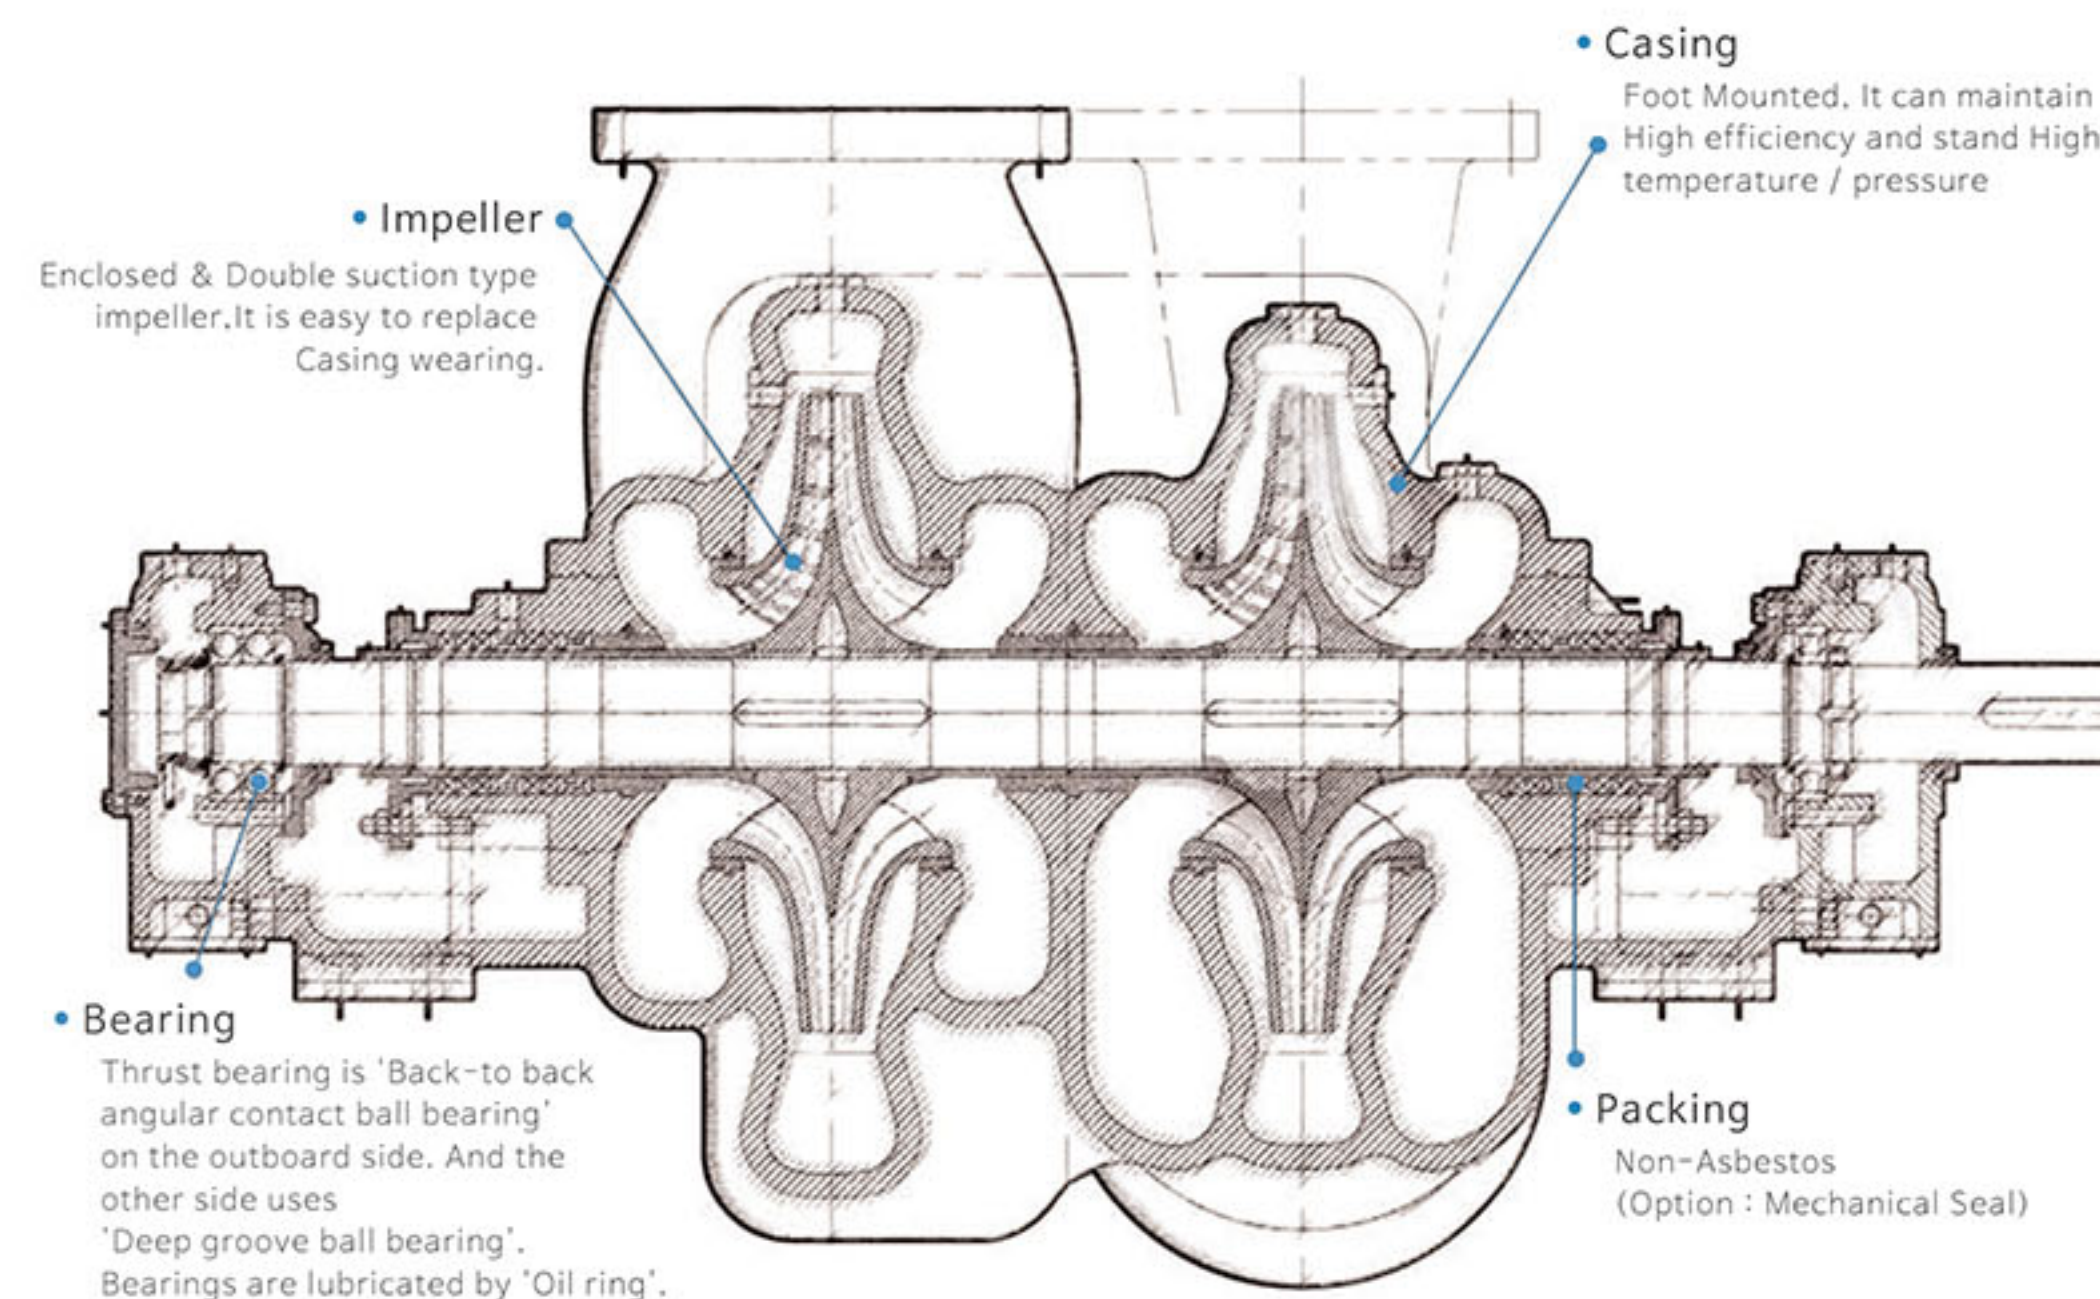

● Photo Resources

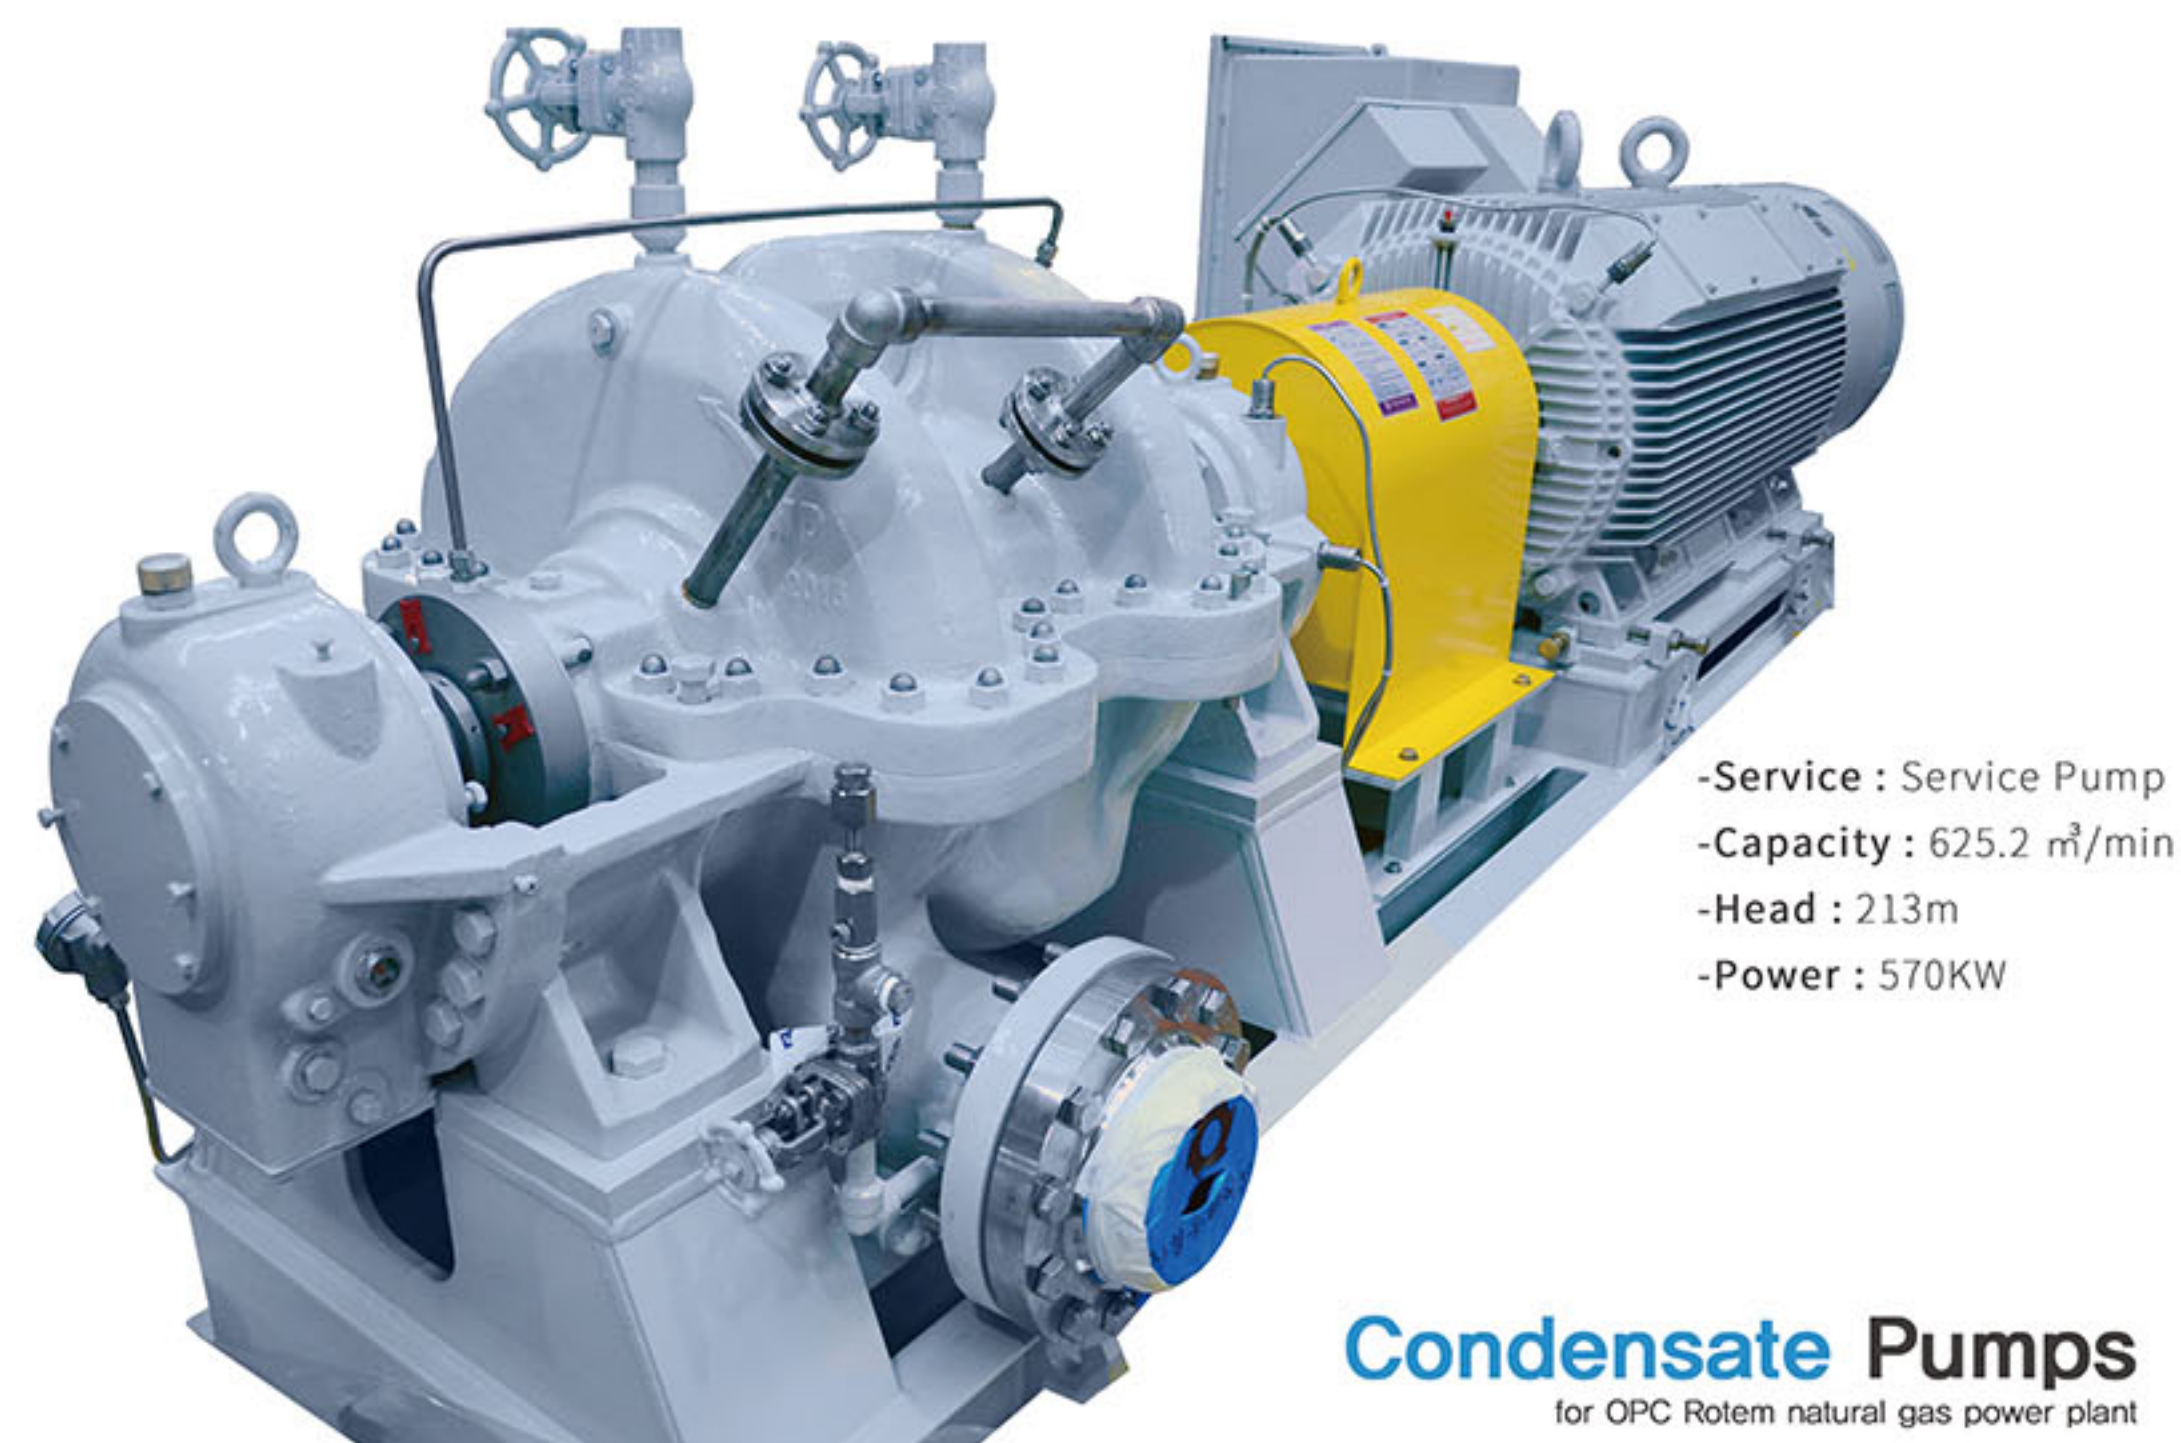

Condensate Pumps
for OPC Rotem natural gas power plant